


12 BATTERY TERMINAL LUBRICATION MACHINE




MACHINES FOR
BATTERY PRODUCTION AND SPECIALISED
MECHANICAL ENGINEERING

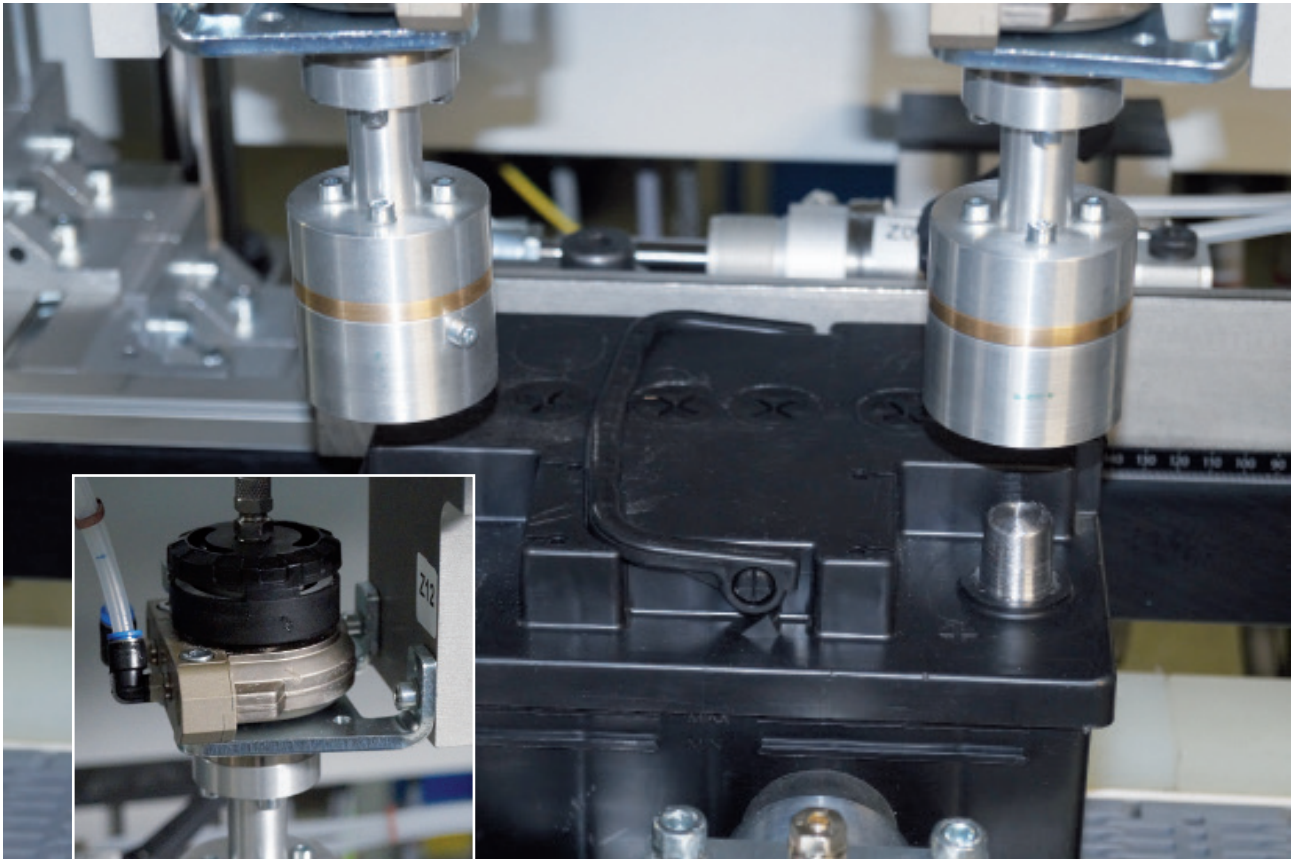

Lubricating system

Function and characteristics

- Automatic lubricating of battery terminals
- Precise dosing by a lubricant storage and dosing system
- Suitable for car and truck batteries
- Manual or automatic adjustment available

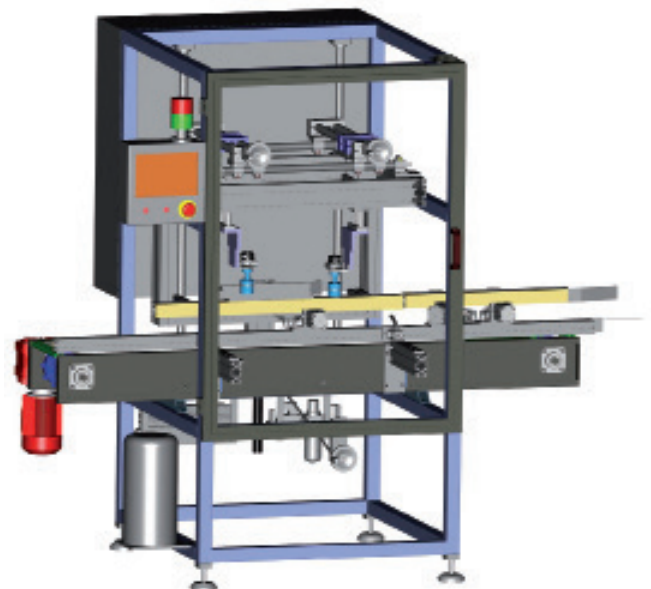

12 BATTERY TERMINAL LUBRICATION MACHINE



MACHINES FOR
BATTERY PRODUCTION AND SPECIALISED
MECHANICAL ENGINEERING

Technical data

Battery types	all vehicles
Battery dimensions	max. 515 mm x 285 mm x 250 mm [W x D x H]
Capacity	10 - 12 batteries/minute
Maximum dimensions (W x D x H)	2,000 x 1,200 x 2,000 mm
Conveyor belt height	850 mm +- 50 mm
Conveyor belt width	300 mm
Electrical connections	400 V, 50 Hz
Control voltage	24 V
Compressed air	6 bar
Material	stainless steel, acid-resistant plastic
Control	Siemens / Allen Bradley

Our goods and services = Your benefit

- Worldwide technical and customer service
- Long experience in battery plant design
- Individual system solutions for your production
- Comprehensive advice and on-site analysis

Accumation GmbH

Lindenstraße 3
65555 Limburg-Offheim
GERMANY

Phone: +49 6431 285650-0
Fax: +49 6431 285650-29
info@accumation.de
www.accumation.de

Good reasons for ACCUMATION ...

... we take your production on the road to success because we have the technology you need.

**We look forward
to hearing from you!**