


Battery terminal lubrication machine



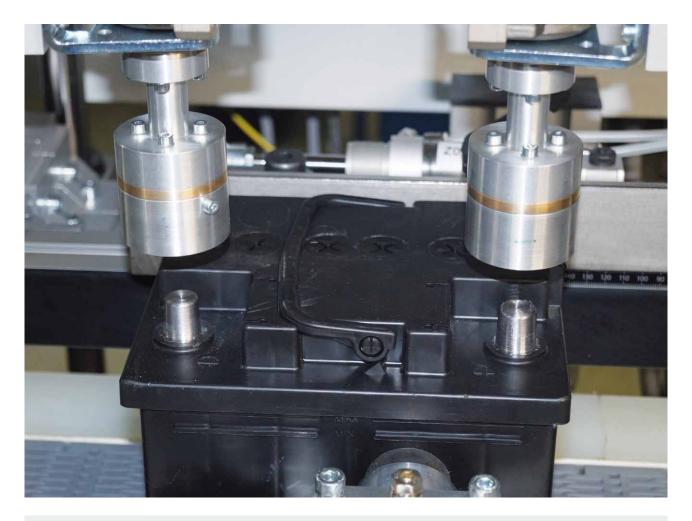

Your benefits:

- Automatic lubricating of battery terminals
- Precise dosing by a lubricant storage and dosing system
- Suitable for car and truck batteries
- Manual or automatic adjustment available



Battery terminal lubrication machine

Technical details:

| Battery type | all vehicles |
|--------------------------------|---|
| Battery dimensions (W x D x H) | max. 515 x 285 x 250 mm |
| Capacity | 10 – 12 batteries/min. |
| Max. dimensions (W x D x H) | 2,000 x 1,200 x 2,000 mm |
| Conveyor belt height | 850 mm +/- 50 mm |
| Conveyor belt width | 300 mm |
| Electrical connection | 400 V, 50 Hz |
| Control voltage | 24 V |
| Compressed air | 6 bar |
| Material | stainless steel, acid-resistant plastic |
| Control | Siemens / Allen Bradley |

We offer comprehensive services and know how:



Everything from a single source:

Thanks to our integration into the **Pütz Group** and the resulting **synergy effects** we are able to offer you not only battery production machines but also the appropriate testing technology to test surfaces, for dimensional accuracy and completeness.

Accumation GmbH

Lindenstraße 3 65555 Limburg-Offheim GERMANY info@accumation.de Phone: +49 6431 285650-0 www.accumation.de