
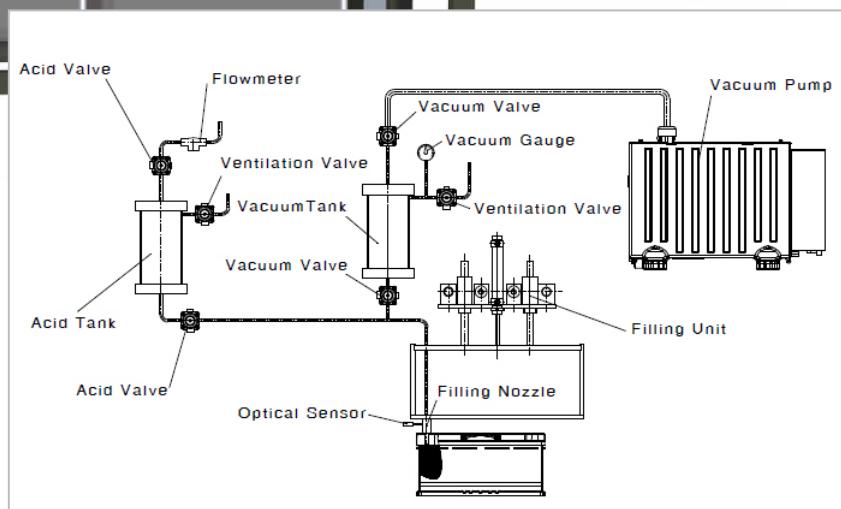


AGM acid filling machine

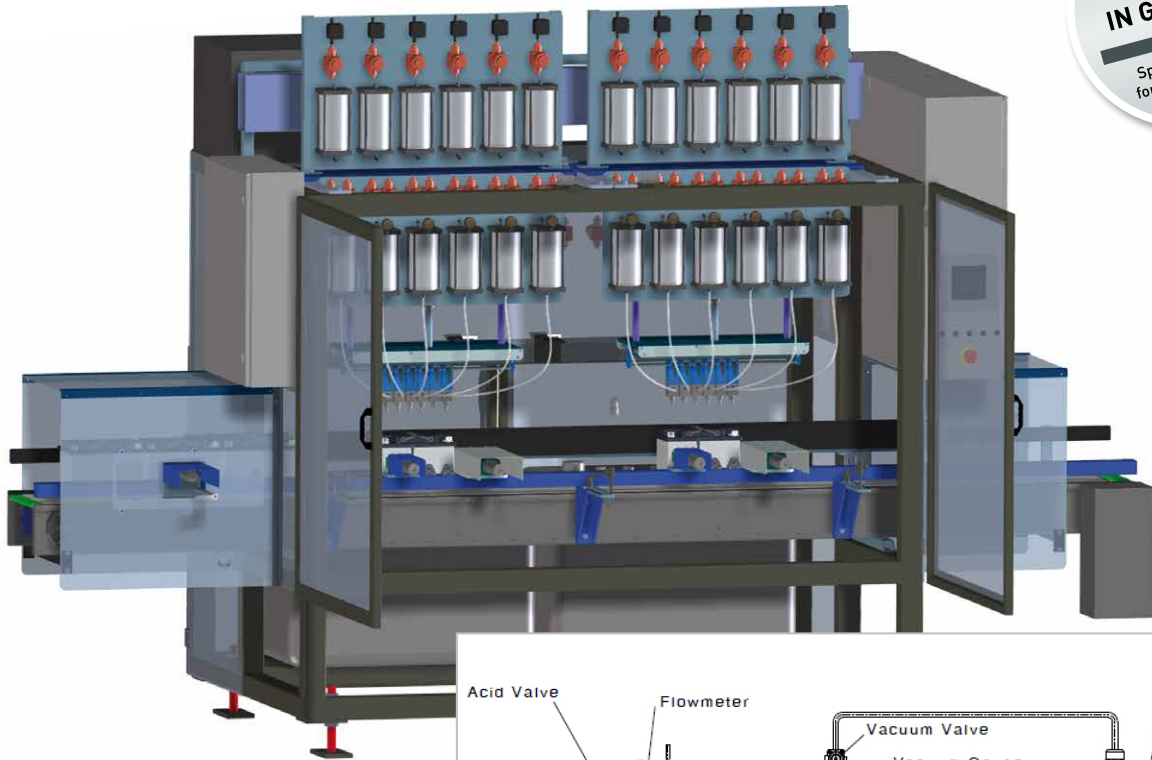

Your benefits:

- + Filling of AGM batteries
- + Perfect absorption of the acid into the groups by special vacuum system (adjustable)
- + Adjustable battery guide- and stop system
- + Volume is controlled by flowmeters or volumetric dispensing pumps
- + Accuracy +/- 0,75% or less
- + Use of 100% acid resistant materials
- + Available for automotive and industrial batteries

AGM acid filling machine

Technical details:

Battery type	all automotive and industrial batteries
Battery dimensions (L x W x H)	max. 550 mm x 280 mm x 360 mm min. 175 mm x 125 mm x 175 mm
Capacity	up to 4 AGM batteries/min., depending on battery size and group compression
Accuracy	+/- 0,75% or less
Dimensions (L x W x H)	approx. 3,000 x 1,850 x 2,200 mm
Conveyor belt height	850 mm +/- 50 mm
Conveyor belt width	200 mm or 300 mm
Wight	2,000 kg
Material	stainless steel, acid-resistant plastic
Control voltage	24 V
Electrical connection	400 V, 50 Hz
Verbrauch	approx. 6 kW
Compressed air	6 bar R 1/4"
Visualisierung	Touch Panel
Control	Siemens / Allen Bradley

Everything from a single source:

Thanks to our integration into the **Pütz Group** and the resulting **synergy effects** we are able to offer you not only battery production machines but also the appropriate testing technology to test surfaces, for dimensional accuracy and completeness.

Accumation GmbH
Lindenstraße 3
65555 Limburg-Offheim
GERMANY

info@accumation.de
Phone: +49 6431 285650-0
www.accumation.de